


Betrak product information

Betrak - Busbar Power Distribution System

Length	No of sockets	Centres (mm)	Standard White 63Amp	Clean Earth (CE) (Low Noise Earth) Red 63Amp	Dual Circuit (Standard/Low Noise) Green 63Amp	Auxiliary Black 63Amp	3 Phase Blue 63Amp
			N L	CE N L	CE N1 L1 N2 L2	PE N L	PE N L3 L2 L1
3.6m	12	300	PBST 3336	PBCT 4336	PBDT 6336	PBAT 3336	PBTT 5336
2.4m	8	300	PBST 3324	PBCT 4324	PBDT 6324	PBAT 3324	PBTT 5324
1.8m	6	300	PBST 3318	PBCT 4318	PBDT 6318	PBAT 3318	PBTT 5318
1.2m	6	300	PBST 3312	PBCT 4312	PBDT 6312	PBAT 3312	PBTT 5312


Feed Unit	Socket Key Codes					
		PBSF 3010	PBCF 4010	PBDF 6010	PBAF 3010	PBTF 5010

Centre Feed Unit					
	PBSFCS 3010	PBFCC 4010	PBFCD 6010	PBFCA 3010	PBFCT 5010


Flexible Corner						
1m		PBSB 3031H	PBCB 4031H	PBDB 6031H	PBAB 3031H	PBTB 5031H
2m		PBSB 3032H	PBCB 4032H	PBDB 6032H	PBAB 3032H	PBTB 5032H

Flexible Corner Kit					
	PBSB 3000	PBCB 4000	PBDB 6000	PBAB 3000	PBTB 5000

Typical Floor Layouts

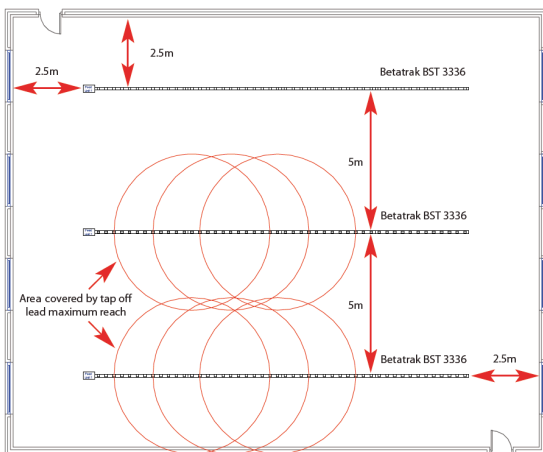

Busbar
3m tap offs provide full coverage when busbar is laid out on 5m centres

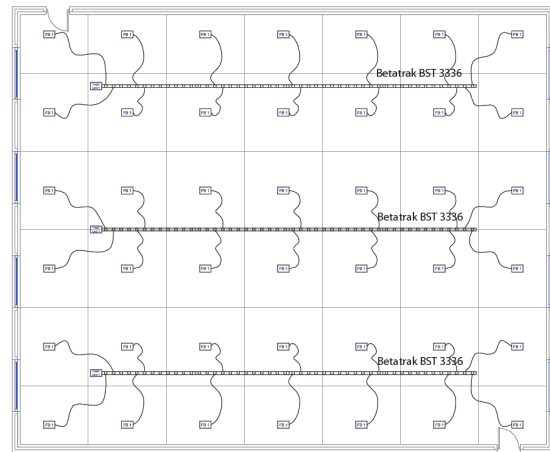

Floor boxes
Typical layout: 1 floor box for every 10m²