

Eclipse power and data



A through desk power and data module that pulls up from the work surface and pushes back down to a flush position when not in use.

- Standard finish is anodised silver body with grey (RAL7004) socket fascias
- Easy to fit to new furniture or to retrofit using a 115mm hole saw
- Incorporates an under desk, hand tightened barrel nut to fix unit into place
- Fully segregated power and data
- Choice of power and data connectors to most specifications
- Power and data cables all exit from the base of the unit
- Standard lead length is 3m mains to 13A plug
- All UK power sockets feature integral fuses
- Choice of 3.15A or 5A fuses are available to comply with BS 6396
- Complies with BS 5733



Power or data sockets available

Lateral fuses with a choice of 3.15A or 5A to comply with BS 6396

Configurable modifications



power modules

power modules

Eclipse power and data



Code	Description
83P066	Eclipse 2 x power, 3m mains lead to 13A UK plug
83P067	Eclipse 4 x power, 3m mains lead to 13A UK plug
83U235	Eclipse 2 x power, 3m mains lead to 13A UK plug, 2 x RJ45 data Cat6, 3m data leads
83U236	Eclipse 4 x power, 3m mains lead to 13A UK plug, 2 x RJ45 data Cat6, 3m data leads
83H099	Eclipse 2 x power, 3m mains lead to 13A UK plug, 2 x RJ45 data Cat6, 1 x VGA, 1 x mini jack, 3m data & AV leads
83CP02	Eclipse 2 x power, 3 mains lead to 13A UK plug, 1x Twin port 2Amp USB Charger
83AV71674	Eclipse 2 x power, 3 mains lead to 13A UK plug, 2 x RJ45 data Cat6, 1 x VGA, 1 x mini jack, 1 x HDMI, 3m data leads
83CP10	Eclipse 2 x power, 3 mains lead to 13A UK plug, 1x Twin port 2Amp USB Charger, 2 x RJ45 data Cat6, 3m data leads
520167	Eclipse 115mm cable outlet




Build it your way

Please see page 47 for more information.



Manage your energy

Configure to allow energy to be monitored and controlled with Footprint. See page 155 for more details.

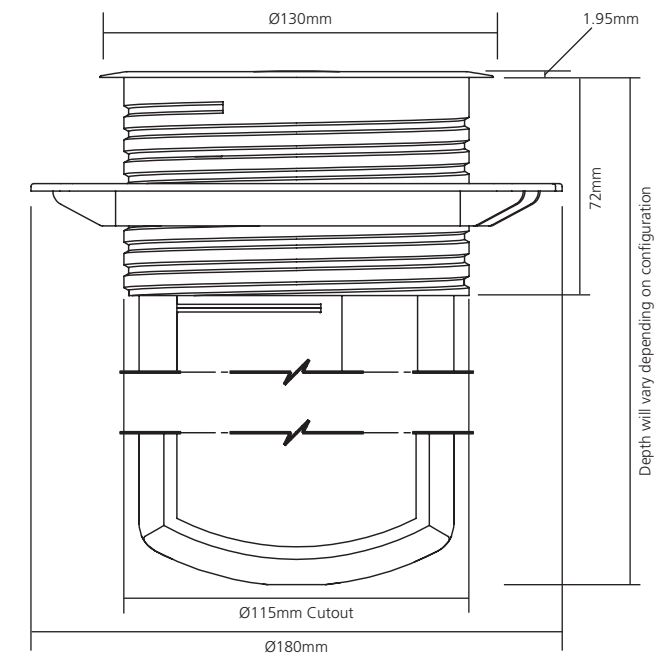

Note: Please note that Cat 6 is backwards compatible. CMD cannot accept any responsibility or liability for providing category 6 performance in products supplied. We will however fit category 6 specification components where specified. *Dimensions are meant as a guide and have a +/- 1mm tolerance.

Fuses only accessible after removal of equipment plug. Lead lengths shown will be the conductor length and not the distance from the end of the module to the plug. For example, a 3m prewired power lead will be approximately 2.875m as 125mm will be internal for the termination. This is also applicable for data leads. Data fascias may be subject to colour change.

HDMI: CMD cannot accept any responsibility or liability for providing HDMI performance in products supplied over 10m in length.

sales line: +44 (0)1709 829511