

If you want the modern, curved appearance of Contour Plastic without the restrictions in length, our metal Contour with its sleek silver anodised metal extrusion is the one for you.

## Contour Metal Power Module


power  
modules



Lateral fuses with a choice of 3.15A or 5A to comply with BS 6396:2008

Anodised aluminium extruded body

Choose from power, USB charging, data, audio and international sockets

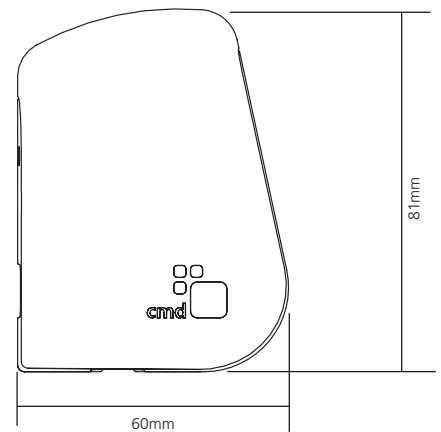

### Features

- Extruded silver metal body for longer lengths
- Power and data cables all exit from the back of the unit unless on a slatwall/tool rail where cables exit from the bottom of the unit
- Unit complies with BS 5733
- All standard options are supplied with a 1m mains lead to 3 pole connector
- Requires a separate mains lead if connected directly to a socket
- Fixing via Contour C clamp or adhesive fixing kit
- Segregation between power and data to comply with BS 6396
- No visible fixing screws



### Build it your way

Please see page 39 for more information.



### Manage your energy

Configure to allow energy to be monitored and controlled with Footprint. See page 156 for more details.

Note: CMD cannot accept any responsibility or liability for providing category 6 performance in products supplied.

Fuses: Only accessible after removal of equipment plug. Lead lengths shown will be the conductor length and not the distance from the end of the module to the plug. For example, a 3m prewired power lead will be approximately 2.875m as 125mm will be internal for the termination. This is also applicable for data leads. Data fascias may be subject to colour change.

Cables: White and grey modules are supplied with white cables and black modules are supplied with black cables.

HDMI: CMD cannot accept any responsibility or liability for providing HDMI performance in products supplied over 5m in length.



UK Code	Schuko Code	Colour	Description
94MCP02BGST	94MCP06BGST	Black	1 x power, 1 x Twin port
94MCP02GGST	n/a	Grey	2Amp USB Charger
94MCP02WGST	94MCP06WGST	White	1m mains lead to 3 pole connector
94M0001	94M0007	Black	1 x power, 1 x Twin port
94M0002	n/a	Grey	4Amp USB Charger,
94M0003	94M0008	White	1m mains lead to 3 pole connector
94MPS01BGST	94MPS03BGST	Black	2 x power,
94MPS01GGST	n/a	Grey	1m mains lead to 3 pole connector
94MPS01WGST	94MPS03WGST	White	
94MCP01BGST	94MCP07BGST	Black	2 x power, 1 x Twin port
94MCP01GGST	n/a	Grey	2Amp USB Charger,
94MCP01WGST	94MCP07WGST	White	1m mains lead to 3 pole connector

UK Code	Schuko Code	Colour	Description
94M0004	94M0009	Black	2 x power, 1 x Twin port
94M0005	n/a	Grey	4Amp USB Charger,
94M0006	94M0010	White	1m mains lead to 3 pole connector
94MUS03BGST	94MUS04BGST	Black	2 x power, 2 x RJ45
94MUS03GGST	n/a	Grey	data Cat6,
94MUS03WGST	94MUS04WGST	White	1m mains lead to 3 pole connector
94MPS02BGST	n/a	Black	4 x power,
94MPS02GGST	n/a	Grey	1m mains lead to 3 pole connector
94MPS02WGST	n/a	White	


modules  
**power**

Note: Separate data cables must be purchased with our new rear access data sockets. Other cable lengths are available on request.

Code	Description
161713	3m Cat 6 data cable. Male to male connector.
161239	2m USB data cable. Male to male connector.
161718	2m HDMI data cable. Male to male connector.

### C clamp


We recommend using 2 x C clamps for any module with more than 2 sockets. Fits desk thickness between 20mm-32mm



Code
440371

### Adhesive Fixing Kit

Adhesive Kit, 1 Kit required per module



Code
440006