

# 3 Compartment Plates

Select from our wide range of serviced power and unserviced data options. Accessory plates are common to most ranges - one piece, individual, screed and stainless floor boxes and slab floor boxes. All accessory plates are finished in light grey paint (RAL 7035).


**Plate sizes - 100mm x 175mm. Can only be fitted in 3 compartment floor and slab boxes.**

1 twin RCD socket




| Code   | Description           |
|--------|-----------------------|
| PP3291 | 3 Compartment Version |

1 twin 13A switched socket

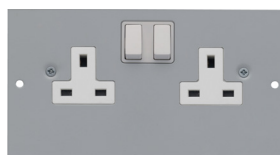

| Code   | Description           |
|--------|-----------------------|
| PCP301 | 3 Compartment Version |

1 twin 13A unswitched socket

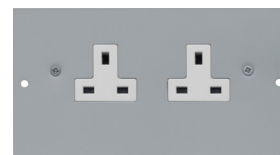

| Code   | Description           |
|--------|-----------------------|
| PCP302 | 3 Compartment Version |

3 single 13A unswitched socket




| Code    | Description           |
|---------|-----------------------|
| PCP3003 | 3 Compartment Version |

Plate pierced to accept 4 x LJ6C/ RJ45 (Piercings 37.0 x 22.3)



| Code  | Description           |
|-------|-----------------------|
| PV304 | 3 Compartment Version |

Plate to accept 2 x LJ2 telephone outlets (Units 68mm Square)

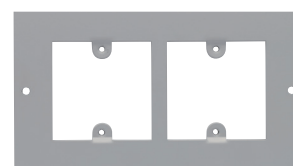


| Code  | Description           |
|-------|-----------------------|
| PV305 | 3 Compartment Version |

Standard BS 1363 2 gang piercing



| Code  | Description           |
|-------|-----------------------|
| PM307 | 3 Compartment Version |

Plate to accept 2 x standard 1 gang fittings (Units 86mm Square)

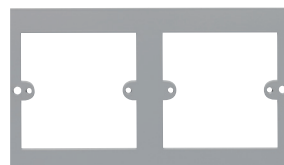


| Code  | Description           |
|-------|-----------------------|
| PV311 | 3 Compartment Version |

Plate pierced to accept 6 x LJ6C/ RJ45 (Piercings 37.0 x 22.3)



| Code  | Description           |
|-------|-----------------------|
| PV342 | 3 Compartment Version |

Angled plate pierced to accept 4 x LJ6C/RJ45 (Piercing 37.0 x 22.3)

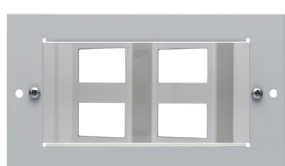

| Code    | Description           |
|---------|-----------------------|
| PDV3301 | 3 Compartment Version |

Plate pierced to accept 4 x RW Data/ Alphasnap Units (Piercings 48.0 x 23.5)




| Code   | Description           |
|--------|-----------------------|
| PD3107 | 3 Compartment Version |

Plate pierced to accept 2 x Euro (50mm x 50mm) Adapter Collars



| Code  | Description           |
|-------|-----------------------|
| PD331 | 3 Compartment Version |

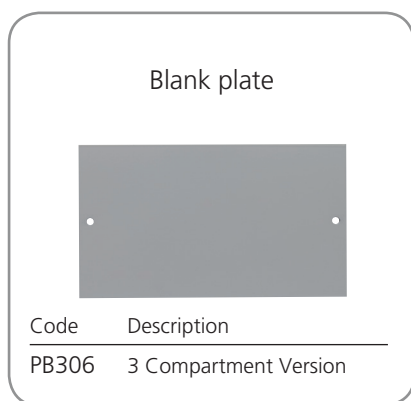

| Code      | Description  |
|-----------|--|
| PP3291    | Twin RCD Socket  |
| PCP301    | Twin Switched Socket Outlet  |
| PCP302    | Twin Unswitched Socket Outlet  |
| PCP3003   | Triple Unswitched Socket Outlet                                      |
| PLT77923  | Single Unswitched 5A Socket Outlet complete with 5A Fused Protection |
| PLT77928* | White Moulded Twin Socket Complete with Twin 3.4A USB Charger        |
| PV304     | 4 No. RJ45 (37.1 x 22.3)   |
| PV305     | Plate pierced to accept 2 - LJ2                                      |
| PM307     | Plate pierced to accept 1 No. 2- Gang Std BS1363 outlet              |
| PV311     | Plate pierced to accept 2 No. 1- Gang Std BS1363 outlet              |
| PV342     | 6 No. RJ45 (37.1 x 22.3)   |
| PDV3301   | 4 No. Angled RJ45  |
| PD3107    | 4 No. R W Data RJ45 (47.0 x 23.5)                                    |
| PD331     | Plate pierced to accept 2 - Euromod Collars (not supplied)           |
| PCP301C   | Clean Earth Twin Switched Socket Outlet                              |
| PCP302C   | Clean Earth Twin Unswitched Socket Outlet                            |
| PCP3003C  | Clean Earth Triple Unswitched Socket Outlet                          |
| PP301N    | Twin Switched Socket Outlet Non-Std - Wandsworth                     |
| PB306     | Blank Plate  |
| PV388     | 8 No. RJ45 (37.1 x 22.3)   |
| PX3210    | White LJU6C size blank data cover                                    |
| PLT98072  | Plate pierced to accept 4 ST Fibre Optic Connectors                  |
| PX6804    | Euromod snap in double adaptor collar                                |

\*Note; Our white moulded twin socket with twin port USB charger is only available for our 3 compartment floor box. A minimum 50mm plug spaces is required for this plate.

# 4 Compartment Plates

Select from our wide range of serviced power and unserviced data options, 4 compartment range for one piece, individual, screed and stainless floor boxes and slab boxes 75mm wide. Can be fitted in 1, 2 and 4 compartment slab boxes and 2, 4 compartment floor boxes. All accessory plates are finished in light grey paint (RAL 7035).


**Plate sizes - 75mm x 175mm.**

1 twin RCD socket




| Code   | Description           |
|--------|-----------------------|
| PP4291 | 4 Compartment Version |

1 twin 13A switched socket

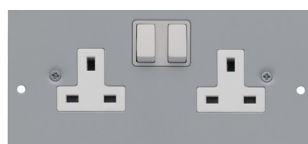


| Code   | Description           |
|--------|-----------------------|
| PCP401 | 4 Compartment Version |

1 twin 13A unswitched socket

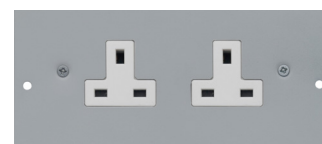

| Code   | Description           |
|--------|-----------------------|
| PCP402 | 4 Compartment Version |

3 single 13A unswitched socket

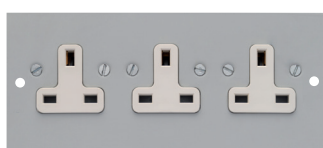


| Code   | Description           |
|--------|-----------------------|
| PCP403 | 4 Compartment Version |

Plate pierced to accept 4 x LJ6C/ RJ45 (Piercings 37.0 x 22.3)



| Code  | Description           |
|-------|-----------------------|
| PV404 | 4 Compartment Version |

Plate to accept 2 x LJ2 telephone outlets (Units 68mm Square)

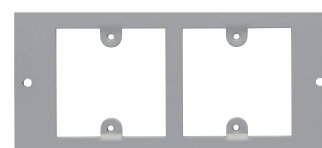

| Code  | Description           |
|-------|-----------------------|
| PV405 | 4 Compartment Version |

Blank plate




| Code  | Description           |
|-------|-----------------------|
| PB406 | 4 Compartment Version |

Plate pierced to accept 6 x LJ6C/ RJ45 (Piercings 37.0 x 22.3)



| Code  | Description           |
|-------|-----------------------|
| PV442 | 4 Compartment Version |

Angled plate pierced to accept 4 x LJ6C/ RJ45 (Piercing 37.0 x 22.3)

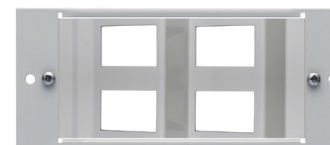

| Code    | Description           |
|---------|-----------------------|
| PDV4301 | 4 Compartment Version |

Plate pierced to accept 4 x RW Data/Alphasnap Units (Piercings 48.0 x 23.5)



| Code   | Description           |
|--------|-----------------------|
| PD4107 | 4 Compartment Version |

Plate pierced to accept 2 x Euro (50mm x 50mm) Adapter Collars



| Code  | Description           |
|-------|-----------------------|
| PD431 | 4 Compartment Version |

Sockets are available in clean earth versions. All twin sockets have a dual earth facility to enable compliance to BS 7671:2008 Amd 3 Regulation 543.7.1.4. If the accessory plate you require is not included in the most widely used selection as shown, please ring technical sales for further information.

Note. 3 and 4 compartment accessory plates cannot be mixed in boxes.

| Code     | Description  |
|----------|--|
| PP4291   | Twin RCD Socket  |
| PCP401   | Twin Switched Socket Outlet  |
| PCP402   | Twin Unswitched Socket Outlet  |
| PCP403   | Triple Unswitched Socket Outlet                                      |
| PLT98094 | Single Unswitched 5A Socket Outlet complete with 5A Fused Protection |
| PV404    | 4 No. RJ45 (37.1 x 22.3)   |
| PV405    | Plate pierced to accept 2 - LJ2                                      |
| PB406    | Blank Plate  |
| PV442    | 6 No. RJ45 (37.1 x 22.3)   |
| PDV4301  | 4 No. Angled RJ45  |
| PD4107   | 4 No. R W Data RJ45 (47.0 x 23.5)                                    |
| PD431    | 2 No. Euro Adaptor collars (50 x 50)                                 |
| PCP401C  | Clean Earth Twin Switched Socket Outlet                              |
| PCP402C  | Clean Earth Twin Unswitched Socket Outlet                            |
| PV4004   | 4 No. RJ45 in line (37.1 x 22.3)                                     |
| PX3210   | White LJU6C size blank data cover                                    |
| PD4329   | Plate pierced to accept 4 ST Fibre Optic Connectors                  |
| PX6804   | Euromod snap in double adaptor collar                                |