

# Capsule - Information and Instruction Sheet

Capsule is a stylish on desk power module that features two UK sockets, each with an individual on/off switch and 3A thermal reset. The module also includes a fully integrated Type A and an adaptive Type C charger.




## Main features

1. Choice of black or white.
2. 2x UK sockets with individual on/off switches and 3A thermal reset.
3. Fully integrated Type A and C dual port USB, adaptive power supply.
4. 2x data blanks that can be removed to accept a range of keystone couplers.
5. Supplied with C clamp fixing to fit a range of desk thicknesses.
6. USB Type A and Type C chargers are designed and tested to: EMC (EN61000/EN55022/EN55020/EN55024/EN55013/EN55014 and LVD (EN60950)




Matching Desk Fixing C Clamp

## Dimensions

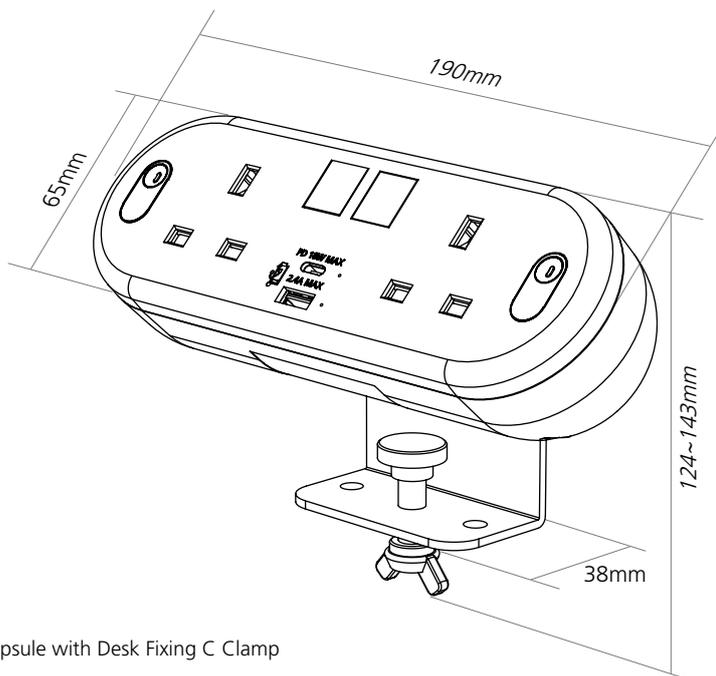

Capsule with Desk Fixing C Clamp

## Contents

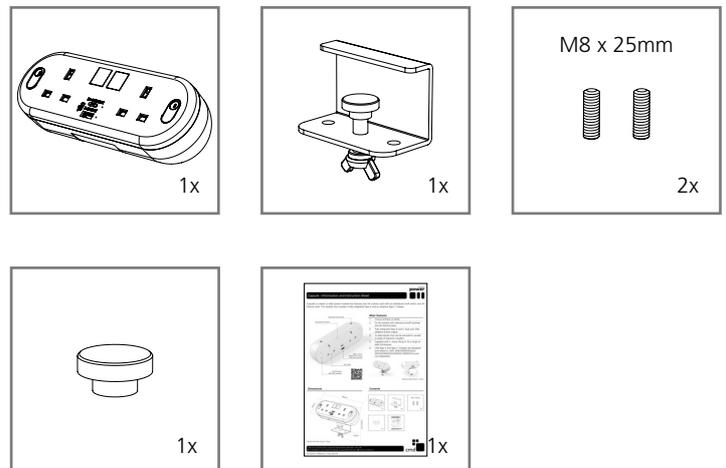




# Capsule - Information and Instruction Sheet


## Instructions

1. Capsule is supplied with a desk fixing C clamp as standard. This can be used on desk thicknesses of 11mm to 30mm. Note: 2x M8 x 25mm grub screws are supplied and can be used to fit the C clamp to sliding desk tops or where space is limited under the desk.
2. Remove the Capsule module and the C clamp from the box.
3. Find a suitable place for the module to be installed and position the back of the module against the back of the desk.
4. Take the C clamp and un-screw the fixing bolt to its maximum position.
5. Place the upper section of the C clamp onto the base at the back of the module and tighten the thumbs screw until the module is secured to the desk surface. (Note: this may require access to the underside of the desk)
6. The 1.5m cable and Wieland connector should be placed into a cable management basket under the desk and connected to the power supply by a qualified or competent person.
7. To reset the thermal reset, remove all plugs from the UK sockets, leaving the On/Off switches 'on'. Press the red reset button on top of the module until the LED lights on the switches are illuminated.

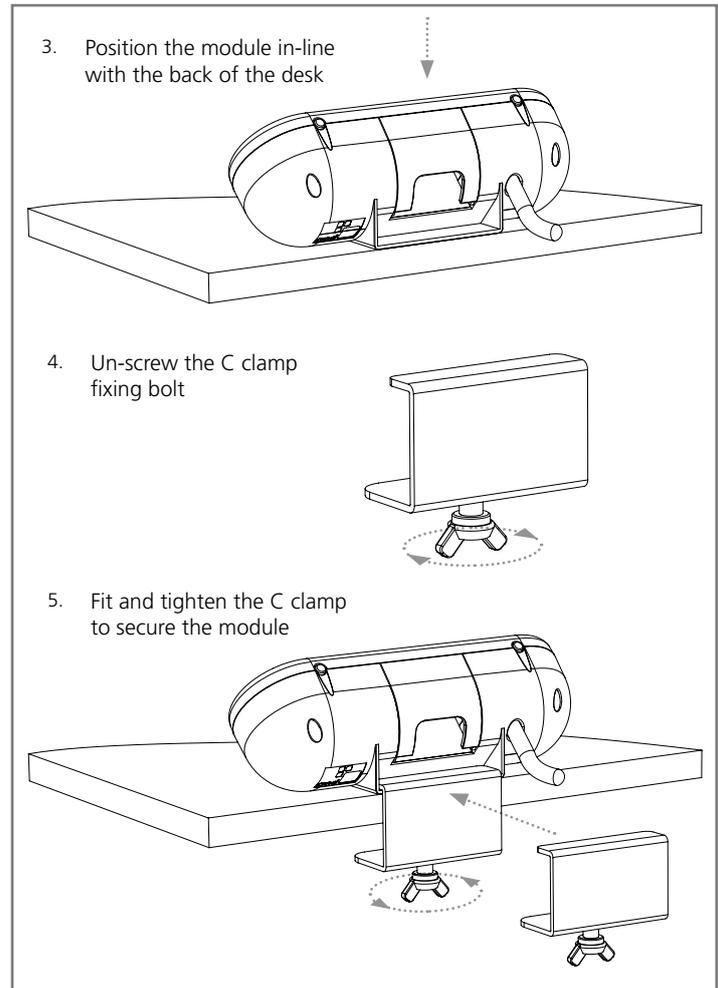

## Fitting the Keystone Couplers

(Note: Keystone couplers may vary in size, which may affect the way they fit into the Capsule module)

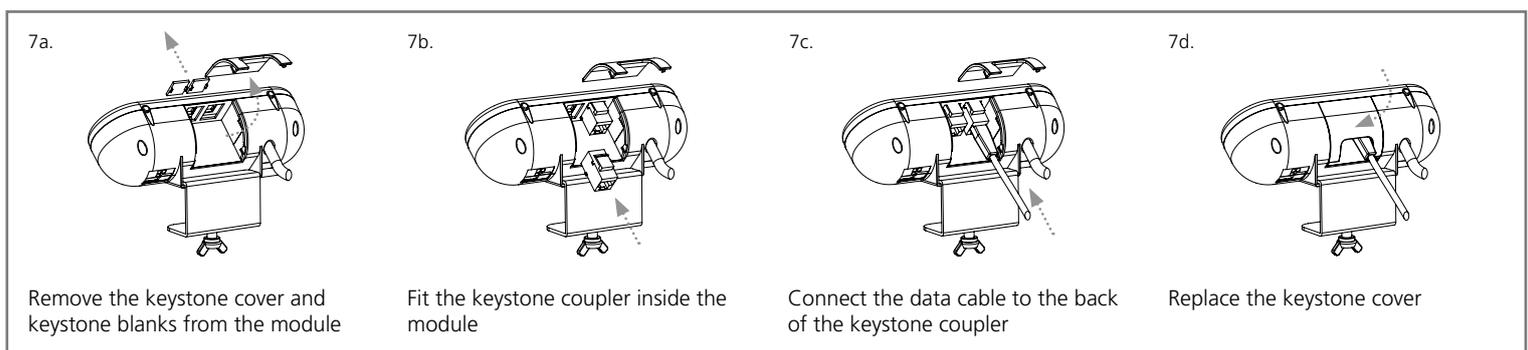

## Warning

Do not use this product for any purpose other than which it was designed for.

All electrical cables should be fitted by a qualified or instructed person.

Do not dismantle or remodel the power module.

## Cleaning, Storage & Maintenance

Cleaning & Maintenance

Dry cloth, no abrasives or solvents to be used on the module surface.

Handling & Storage

Do not drop or expose to moisture.