

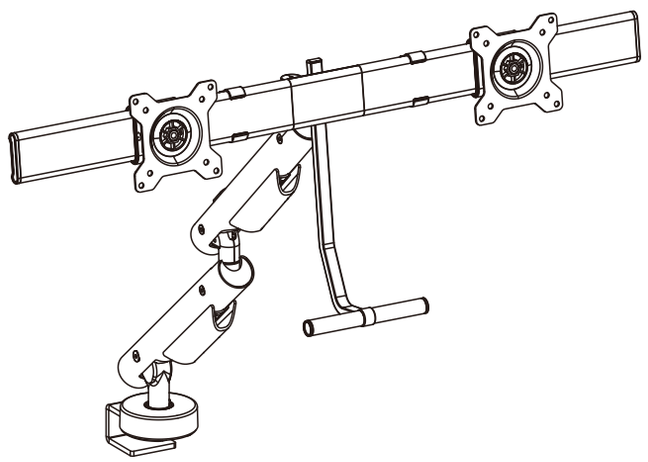


Dimensions


Designed to fit onto desks with 16-25mm thickness with the included clamp.

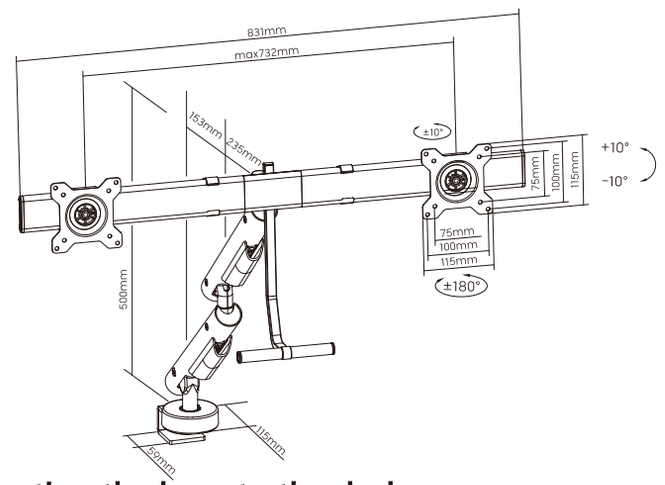


Mounting the base to the desk




Remove the decorative cover and limiting cover pre-installed on the base.




Loosen but do not remove the screws.




Place the base near the edge of the desk and offer up the C-clamp as shown.




Ensure 2x clamp screws locate in holes in the base and tighten fully. Tighten both evenly.




Install the limiting pin for 180° arm rotation, or remove it for full 360° rotation.



Slide the limiting cover down onto the base shaft with the notch facing as shown.




Place the decorative cover over the base with the cut-out facing the desk edge.




The base is now secured in place and ready for the arm to be installed.


Contents

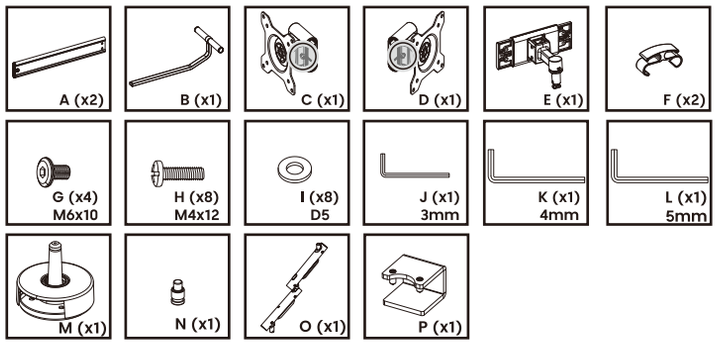


Pre-tensioning the arm (if monitor weight is known)




Use the 5mm Allen key to turn the adjuster at the base of the lower arm as shown.




Arrow shows direction to turn the adjuster. + for heavier monitors. - for lighter monitors.




The window on the lower arm indicates the monitor weight setting, from 2.5-9kg.(Including the 2kg dual beam)



Turn the adjuster anti-clockwise to suit lower weight monitors. Do not adjust past STOP.




Turn the adjuster clockwise to suit heavier monitors upto a max. weight of 9kg.(Including the 2kg dual beam)




Ensure to align the desired weight setting centrally in the window. Do not adjust past STOP.


Installing the arm



Lower the arm onto the installed base on the desk.




Guide the lug on the side of the arm into the slot on the limiting cover as shown.




The arm is now secured in place and ready for the head and monitor to be installed.


Attach the Connector Plate


Insert the connector plate (E) into the arm ensuring that the arrows are aligned as shown.






Rotate the connector plate 180° as shown.







Attach the VESA Head (with slider)



Attach the VESA head (D) and cable clip(F) to the crossbar(A)




Attach the VESA head (C) and cable clip(F) to the crossbar (A)



Tighten the screw to secure the VESA head.

Attach the Crossbar

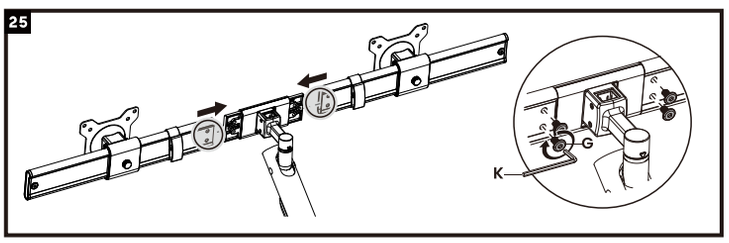


Attach the crossbar to the connector plate and tighten the screws (G) to secure it.

Attach the Handle




Attach the handle (B) to the connector plate and tighten the screws using the tool (J) to secure it.


Attach the monitors




Loosen the screws on the slider as shown.



Remove the VESA plate.

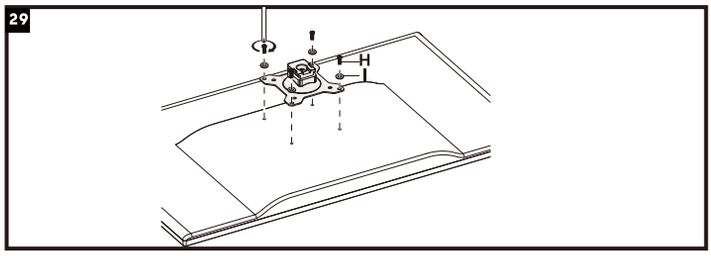


Attach VESA plate to the monitor.

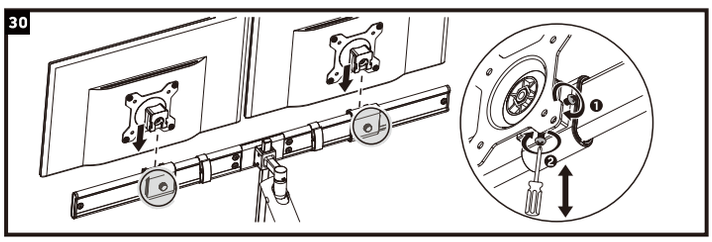

Attach the monitors to the sliders and tighten the screws to secure them. Adjust the screw 2 as shown to fine-tune the height of the display if needed.

Additional monitor adjustment

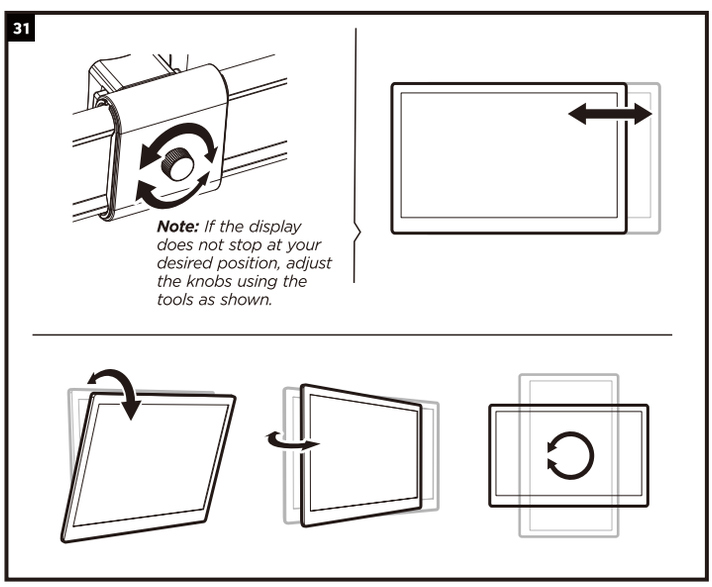

The monitor supports left-right movement.
The monitor supports forward and backward tilt, left-right swivel, and portrait-to-landscape rotation.

Additional information

Safety

- Fix this product securely to the monitor arm, which must be capable of supporting a maximum load of 3.5kg per monitor.
- Product to be used only for the intended purpose of supporting certain display equipment in an office environment.
- Installation is to be carried out in accordance with relevant Health & Safety regulations and only to be carried out by a skilled or competent person.
- The installation should be installed to comply with the relevant national standards and be inspected and tested prior to being put into service (in the UK BS 7671 Wiring Regulations or BS 6396 Office and Educational Systems Best Practice).
- If mounting a curved monitor, it is highly recommended to perform a test install to ensure it will be supported correctly, as curved monitors can exert a greater force on the arm's tilt mechanism. If in doubt, contact CMD to discuss.
- Do not misuse, dismantle or re-configure the product because doing so will invalidate the warranty.

Standards

- Refer to the Declaration of Conformity.

Product care

- Clean using a dry cloth. No abrasives or solvents to be used on the product.
- Do not drop or expose to moisture.

Part No: 134438 Issue No: 001

HEAD OFFICE
Sycamore Road, Eastwood Trading Est. Rotherham, South Yorkshire, S65 1EN
+44 (0)1709 829 511
sales@cmd-ltd.com

LONDON SHOWROOM
3 Baltic Street East London, EC1Y 0UJ
+44 (0)20 7251 7080
sales@cmd-ltd.com

SALES INTO EU
(EU) Luceco SE, Barcelona, 08460, ES.
SPAIN