


## Cable Grommet Power Distribution

CMD Ltd offer two sizes of cable grommets. They are designed for use in commercial environments and provide an efficient fast-fit on site installation and ease of access to power and data services that are contained within or pass through a raised floor. The cable grommets available are:

- 23 Series 127mm diameter cut out (140mm overall diameter).
- 23 Series 210mm diameter cut out (230mm overall diameter).

### The benefits of using a CMD cable grommet:

- Multiple options available designed to meet your specification requirements.
- Designed to comply with BS EN 61534 Traffic Load Tests.
- Low profile Cable Hive surround to reduce the risk of tripping as per BS EN 61534-22 Powertrack systems. Particular requirements for powertrack systems intended for onfloor or underfloor installation, section 9.
- Can be installed in seconds without the use of tools.


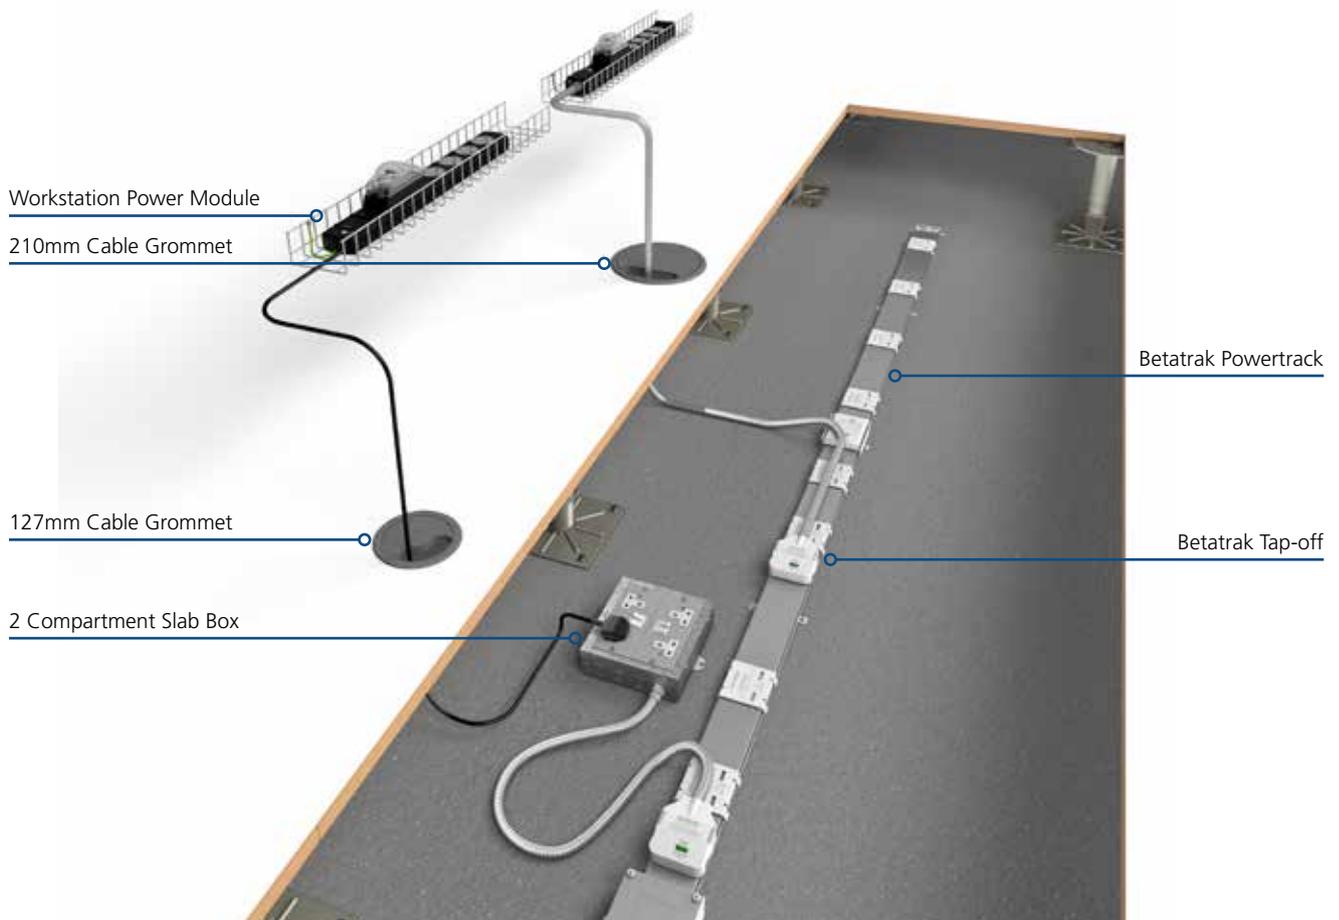


## Cable Grommet (127mm Cut Out)

The 23 Series cable grommet is suitable for raised floor applications. The 23 series cable grommets are designed for use in commercial environments and provide an efficient fast-fit on site installation and ease of access to power and or data services within the floor void.

### Features include:

- Push down, tool free fixing mechanism for fast-fit on site installation.
- Grey RAL7031 lid and trim V0 rated PC/ABS.
- Lid has integral carpet gripper spikes.
- Rotatable lid provides several outlet options including a single large slot.
- Low profile surround.
- Can accommodate up to 4x 20mm or 3x 25mm diameter conduits
- Recommended for installation in light traffic areas.

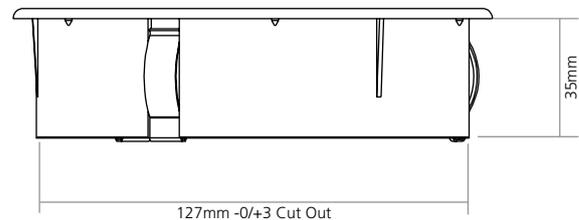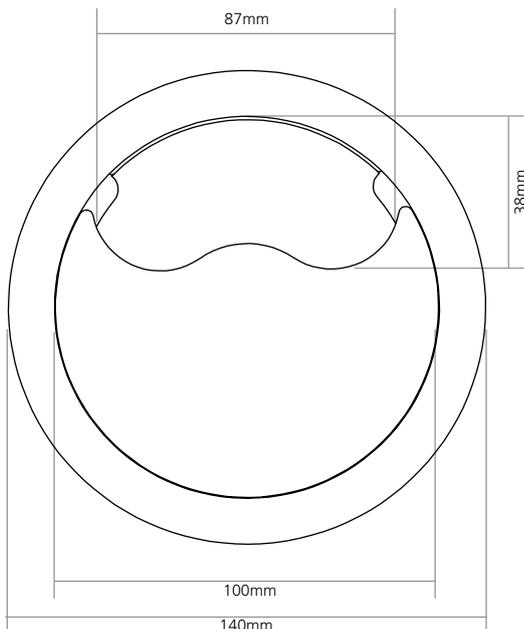

Code	Description
PCFG235G	127mm Grommet

### Maximum number of conduits when lid is in place.

- 8x 16mm Conduit
- 4x 20mm Conduit
- 3x 25mm Conduit
- 2x 32mm Conduit

# Cable Grommet





## Cable Grommet (210mm Cut Out)

The 23 Series cable grommet is suitable for raised floor applications. The 23 Series cable grommets are designed for use in commercial environments and provide an efficient fast-fit on site installation and ease of access to power and/or data services within or passing through a raised floor.

### Features include:

- Push down, tool free fixing mechanism for fast-fit on site installation.
- Grey RAL7031 lid and trim V0 rated PC/ABS.
- Lid has integral carpet gripper spikes.
- Rotatable lid provides several outlet options including a single large slot or three apertures.
- Low profile surround.
- Can accommodate up to 8x 20mm or 5x 25mm diameter conduits.
- Recommended for installation in light traffic areas.

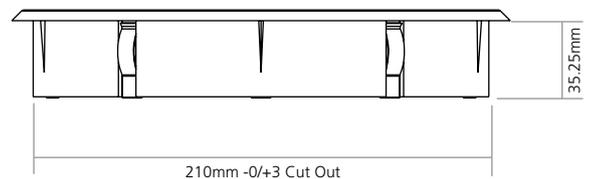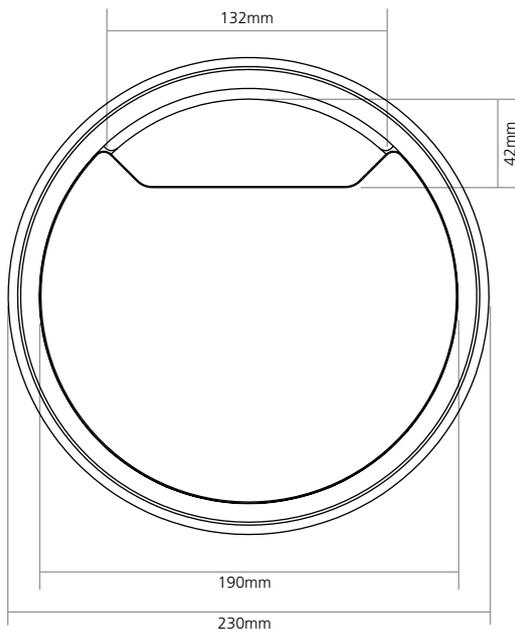

Code	Description
PCFG238G	210mm Grommet

### Maximum number of conduits when lid is in place.

- 12x 16mm Conduit
- 8x 20mm Conduit
- 4x 25mm Conduit
- 3x 32mm Conduit