

25 Series Floor Box



5 Year
Warranty



100%
Recyclable



INTRODUCTION


The 25 Series floor boxes are suitable for raised floor applications and can be divided into 3 or 4 compartments. The 25 Series floor boxes are designed for use in commercial environments and provide an efficient fast-fit installation and ease of access to power sockets and data.

KEY FEATURES


1. Designed to comply with BS EN 61534 Traffic Load Tests.
2. Supplied with dividers to configure into either a 3 or 4 compartment box.
3. Simple rectangular 6.5mm recess for carpet.
4. A choice of three cable entry points.
5. Reversible lid and cable management to aid workplace re-design.
6. Robust, auto close metal handle.
7. Safe touch, integrated, floor tile fixing barbs for quick and easy installation.
8. Galvanised steel back box.
9. Low profile floor box surround and non trip cable outlet brackets designed to comply with BS EN 61534.
10. Can be supplied with Betatrak tap-offs pre-wired to socket outlets.
11. A choice of accessory plate sizes:
 - 3 compartment: 100mm x 175mm
 - 4 compartment: 75mm x 175mm




MATERIAL COMPOSITION

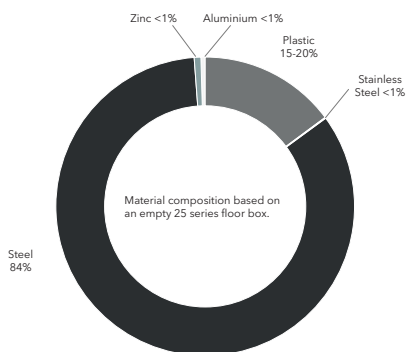

DETAILS AND DIMENSIONS

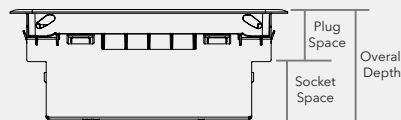

Overall Depth	Plug Space	Socket Space
85mm	27mm	47mm
100mm	41mm	47mm
115mm	56mm	47mm
130mm	71mm	47mm

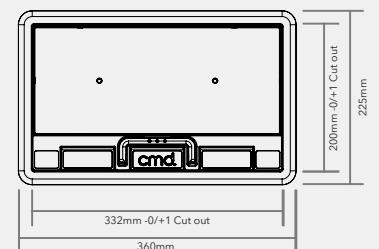

Website



User Guide

ORDERING

The 25 Series floor boxes are available with a range of 3 and 4 compartment accessory plates. Please speak with a member of our sales team to discuss your individual requirements.

Empty 25 Series Floor Box

3/4 COMPARTMENT

Code	Description	Colour
PP2585G	Standard 'Fast-Fit' 85mm Deep	●
PP2510G	Standard 'Fast-Fit' 100mm Deep	●
PP2512G	Standard 'Fast-Fit' 115mm Deep	●
PP2513G	Standard 'Fast-Fit' 130mm Deep	●
Add Suffix KL	Option to add a Key Lock to a floor box lid	

Standard Earth Pre-wired 25 Series Floor Box

c/w 3m or 5m 32A unfused Betatrak Tap-off

3 COMPARTMENT

Code	Description	Colour
3m Standard Earth White Plug, Grey Power Plates		
P25385BS3U100	1x Twin 13A Switched Socket	●
P25385BS3U200	2x Twin 13A Switched Sockets	●
P25385BS3U101	1x Twin 13A Switched RCD Socket	●
P25385BS3U201	2x Twin 13A Switched RCD Sockets	●
5m Standard Earth White Plug, Grey Power Plates		
P25385BS5U100	1x Twin 13A Switched Socket	●
P25385BS5U200	2x Twin 13A Switched Sockets	●
P25385BS5U101	1x Twin 13A Switched RCD Socket	●
P25385BS5U201	2x Twin 13A Switched RCD Sockets	●

4 COMPARTMENT

Code	Description	Colour
3m Standard Earth White Plug, Grey Power Plates		
P25485BS3U100	1x Twin 13A Switched Socket	●
P25485BS3U200	2x Twin 13A Switched Sockets	●
P25485BS3U101	1x Twin 13A Switched RCD Socket	●
P25485BS3U201	2x Twin 13A Switched RCD Sockets	●
5m Standard Earth White Plug, Grey Power Plates		
P25485BS5U100	1x Twin 13A Switched Socket	●
P25485BS5U200	2x Twin 13A Switched Sockets	●
P25485BS5U101	1x Twin 13A Switched RCD Socket	●
P25485BS5U201	2x Twin 13A Switched RCD Sockets	●

Clean Earth Pre-wired 25 Series Floor Box

c/w 3m or 5m 32A unfused Betatrak Tap-off

3 COMPARTMENT

Code	Description	Colour
3m Clean Earth Red Plug, Red Power Plates		
P25385BC3U100	1x Twin 13A Switched Socket	●
P25385BC3U200	2x Twin 13A Switched Sockets	●
P25385BC3U101	1x Twin 13A Switched RCD Socket	●
P25385BC3U201	2x Twin 13A Switched RCD Sockets	●
5m Clean Earth Red Plug, Red Power Plates		
P25385BC5U100	1x Twin 13A Switched Socket	●
P25385BC5U200	2x Twin 13A Switched Sockets	●
P25385BC5U101	1x Twin 13A Switched RCD Socket	●
P25385BC5U201	2x Twin 13A Switched RCD Sockets	●

4 COMPARTMENT

Code	Description	Colour
3m Clean Earth Red Plug, Red Power Plates		
P25485BC3U100	1x Twin 13A Switched Socket	●
P25485BC3U200	2x Twin 13A Switched Sockets	●
P25485BC3U101	1x Twin 13A Switched RCD Socket	●
P25485BC3U201	2x Twin 13A Switched RCD Sockets	●
5m Clean Earth Red Plug, Red Power Plates		
P25485BC5U100	1x Twin 13A Switched Socket	●
P25485BC5U200	2x Twin 13A Switched Sockets	●
P25485BC5U101	1x Twin 13A Switched RCD Socket	●
P25485BC5U201	2x Twin 13A Switched RCD Sockets	●



Website



User Guide

cmd-ltd.com

powerdistribution@cmd-ltd.com

+44 (0) 1709 829511