

25H Series Access Hatch




5 Year
Warranty



100%
Recyclable



MATERIAL COMPOSITION

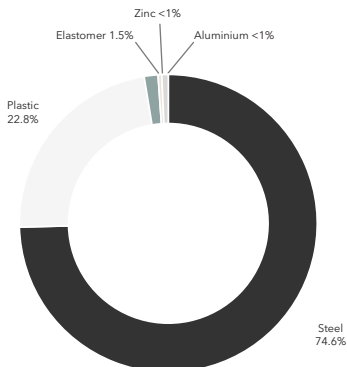

INTRODUCTION



The 25H Series access hatch is suitable for raised floor applications. The 25H Series access hatch is designed for use in commercial environments and provide an efficient fast-fit installation with ease of access to underfloor power distribution systems.

KEY FEATURES

1. Designed to comply with BS EN 61534 Traffic Load Tests, and features low profile lid and non trip cable outlet brackets.
2. Simple rectangular 6.5mm deep lid infill for carpet.
3. A choice of three cable outlet points.
4. Reversible, self closing lid and cable management to aid workplace re-design.
5. Robust, auto close metal handle.
6. Safe touch, integrated floor fixing for quick and easy installation.
7. Hatch opening size 292mm x 174mm.



DIMENSIONS

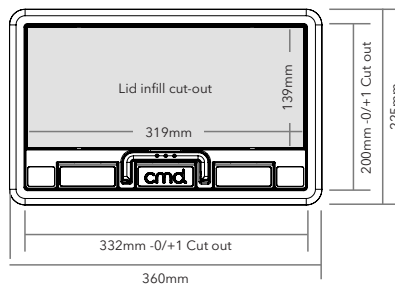

ORDERING

Part Number	Description	Socket Colour
PP25H01G	Access Hatch	N/A
Add Suffix KL	Option to add a Key Lock to a floor box lid	

DETAILS

DESCRIPTION:	25H Series Access Hatch
RANGE:	Power Distribution
APPLICATION:	Raised floor installation
TRIM TYPE:	Flanged
TRIM COLOUR:	Grey - RAL 7031
TRIM FINISH:	Fine sparked
LOCKABLE LID:	Available on request

LOGISTICS

BOXED SIZE:	374mm x 231mm x 47mm	UNBOXED SIZE:	45.3mm x 360mm x 225.5mm
BOXED NET WEIGHT:	1.9kgs	UNBOXED NET WEIGHT:	1.8kgs
BOX QTY:	1 access hatch per box		

INSTALLATION

FLOOR CUT OUT SIZE:	332mm x 200mm +/- 1mm	FLOOR FINISH THICKNESS:	6.5mm
FLOOR THICKNESS:	15-40mm	CABLE OUTLETS:	3x cable outlet brackets
LID DIRECTION:	Reversible tool free lid	CABLE OUTLET SIZE:	63mm x 16mm
LID INFILL CUT-OUT SIZE:	319mm x 139mm	CABLE MANAGEMENT:	3x reversible cable guides (requires a flat head screwdriver not supplied)
LID OPENING SIZE:	292mm x 174mm		
SECURITY:	Option lockable lid (2x keys)		

COMPLIANCE & CERTIFICATION

STANDARDS:	Designed to comply with BS EN 61534-22 IP2X rating in accordance with BS EN 50085-1 Self closing lid and metal handle in accordance with IEC 61534-22
MARKING:	CE, UKCA, WEEE

WARRANTY

WARRANTY TERMS:	5-Year Warranty
-----------------	-----------------

PRODUCT CARE

ROUTINE SERVICING:	Periodic visual inspection
SPARES:	Lids and trim, cable guides and cable outlet brackets
CLEANING & MAINTENANCE:	Clean using a dry cloth. No abrasives or solvents to be used on the product
HANDLING & CARE:	Do not drop or expose to moisture
END OF LIFE:	100% Recyclable



Website



User Guide

